

FIG. 1

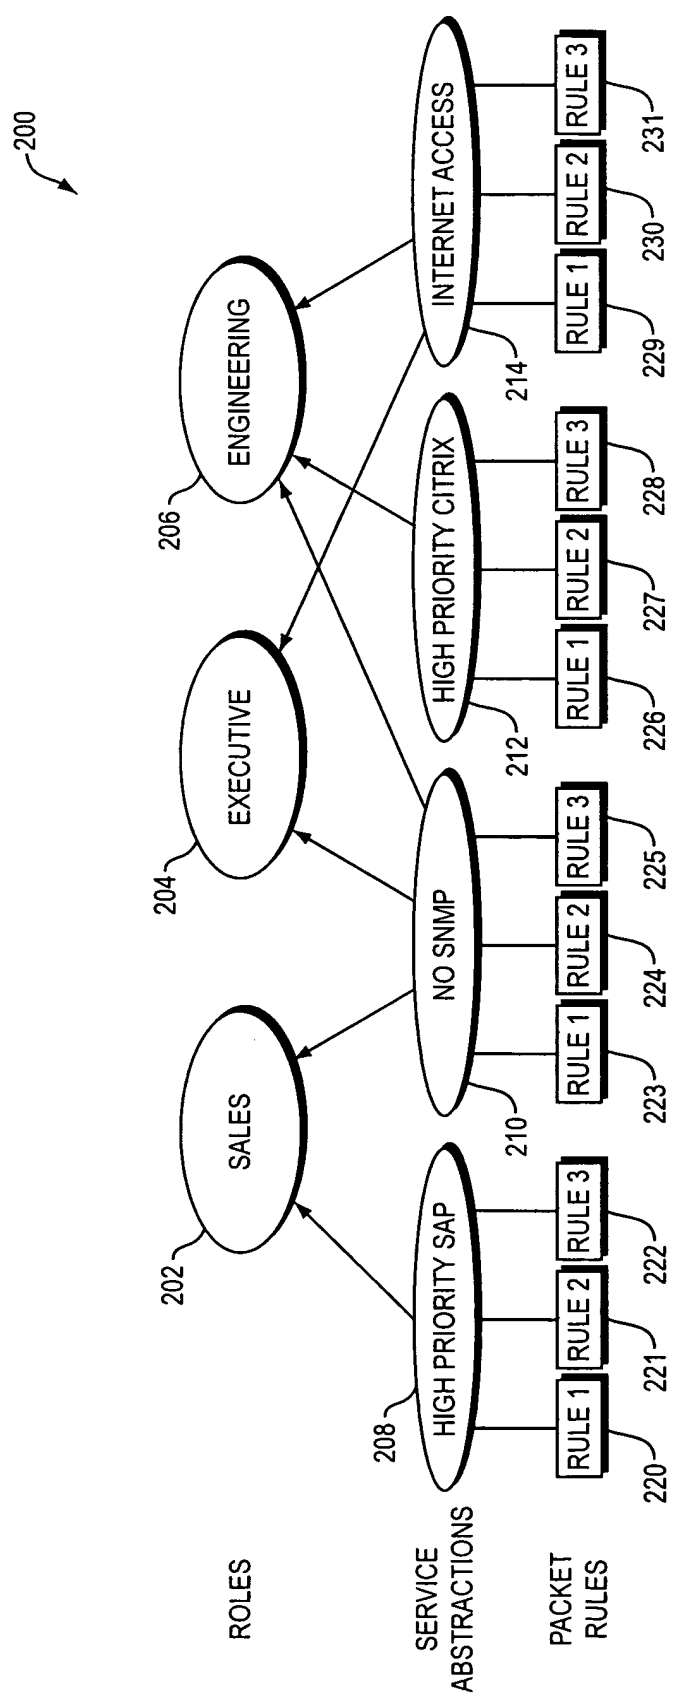


FIG. 2

REPLACEMENT SHEET

3/16

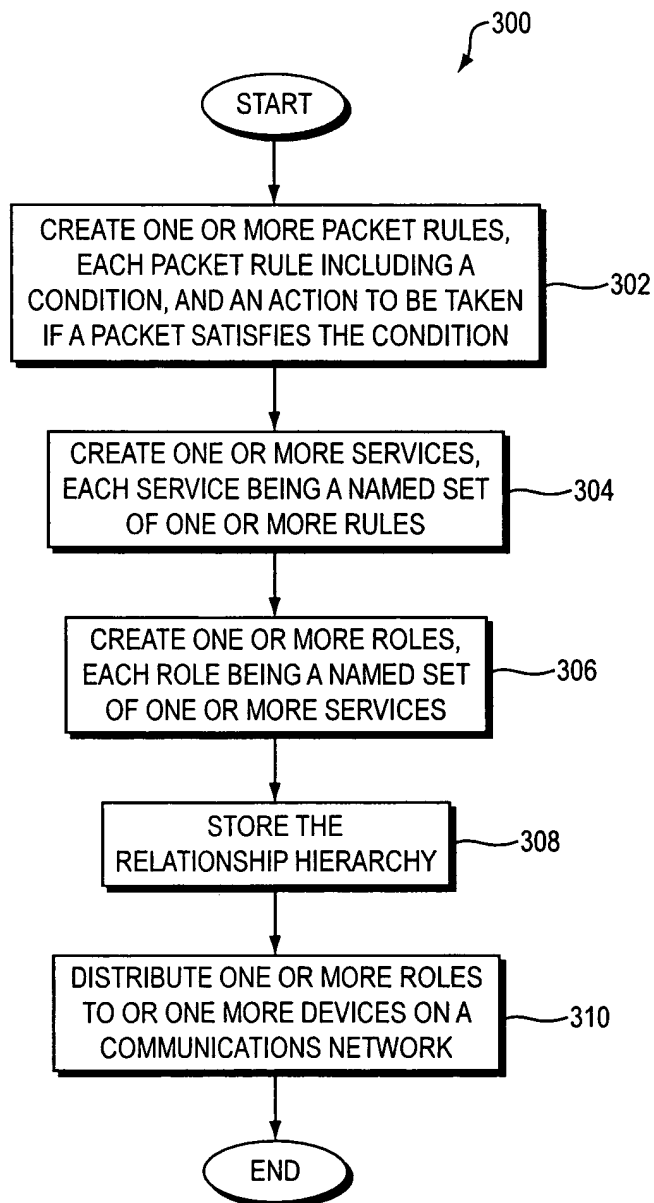


FIG. 3

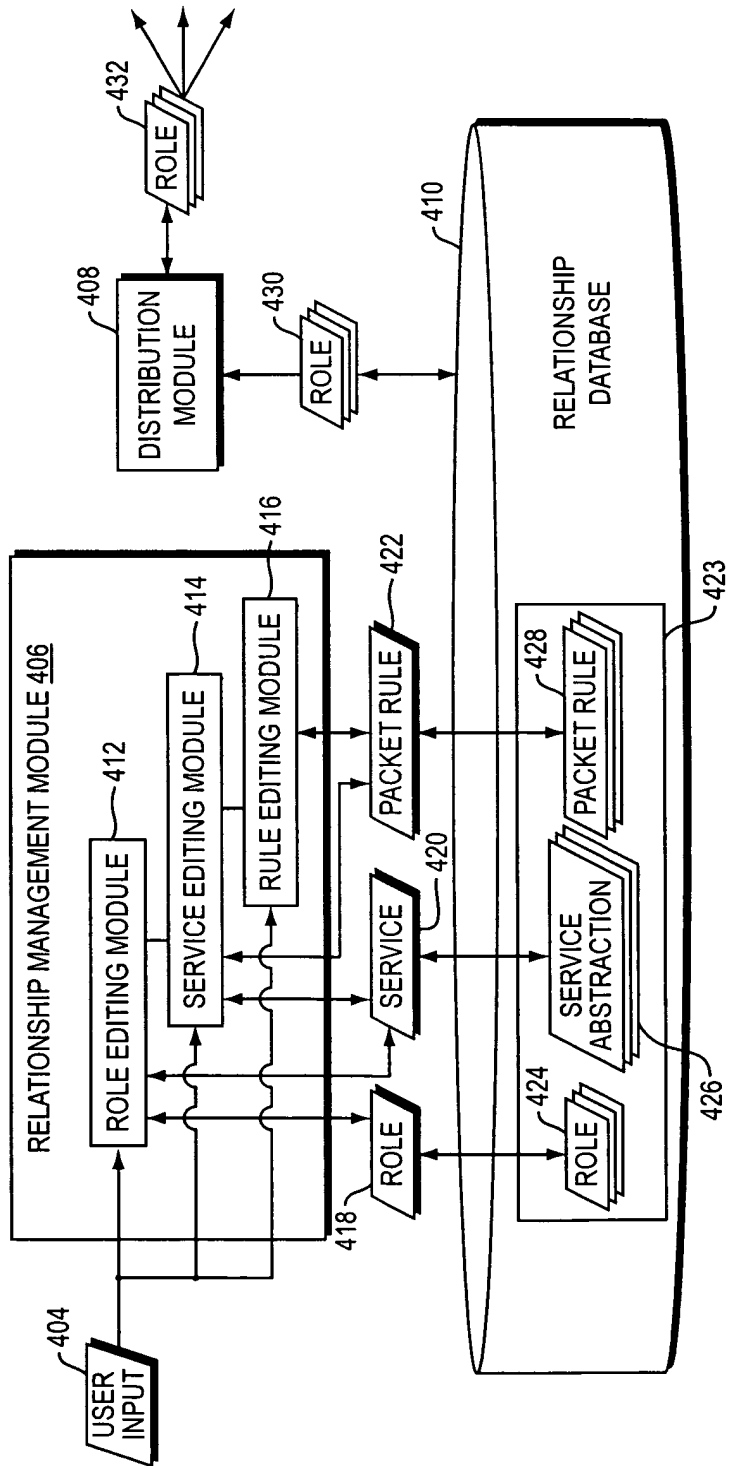


FIG. 4



504		506	508	510	512	514	516	518	520	522	500
NAME	STATUS	TYPE	VALUE	MASK	VLAN	PRIORITY	DENY?	RATE LIMIT	LAYER	502	
CONTAIN SUBNET 54	ENABLED	IP ADDRESS BILATERAL	10.20.54.0	255.255.255.0	55	7	NO	NONE	3		

FIG. 5

600				602
NAME	RULE 1	RULE 2	RULE 3	RULE 4
CONTAIN IP ENG SUBNET TRAFFIC	CONTAIN SUBNET 54	CONTAIN SUBNET 55	CONTAIN SUBNET 56	CONTAIN SUBNET 57

FIG. 6

700					702
NAME	DEFAULT VLAN	DEFAULT PRIORITY	SERVICE 1	SERVICE 2	SERVICE 3
ENGINEERING	5	NONE	CONTAIN DHCP	CONTAIN ICMP	CONTAIN IP ENG SUBNET TRAFFIC
					...

FIG. 7



✕

Edit Rule

Layer

Traffic Classification Layer:

Layer 3 Network ▾

Type

Traffic Classification Type:

IP Address Bilateral ▾

Value

IP Address Bilateral

Enter a valid IP Address in the text box below.
(xxx.xxx.xxx.xxx)

Select a Mask from the choice box below.

Value: 10.20.54.0

Mask: 255.255.255.0 ▾

OK

Apply

Cancel

Help

FIG. 8

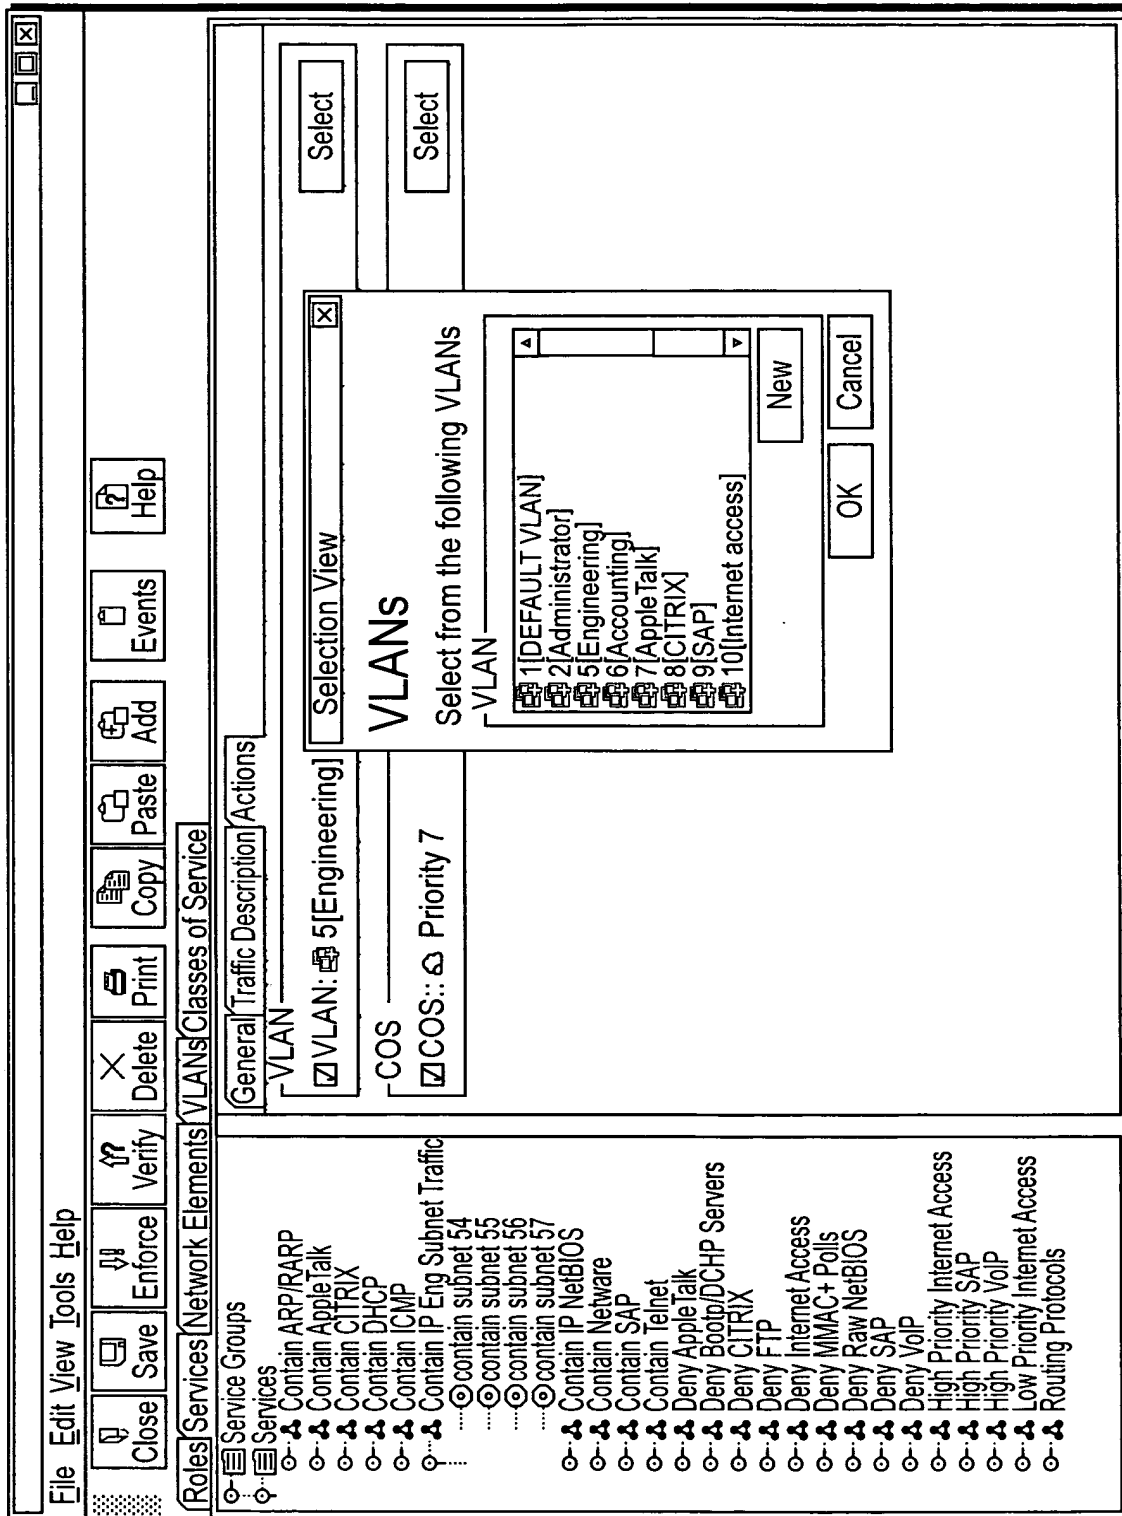


FIG. 9

File

Edit

View

Tools

Help

Close

Save

Enforce

Verify

Delete

Print

Copy

Paste

Add

Events

Help

Roles

Services

Network Elements

VLANs

Classes of Service

Service Groups

o--A Contain ARP/RARP

o--A Contain AppleTalk

o--A Contain CTRIX

o--A Contain DHCP

o--A Contain ICMP

o--A Contain IP Eng Subnet Traffic

o--A Contain subnet 54

o--A Contain subnet 55

o--A Contain subnet 56

o--A Contain subnet 57

o--A Contain IP NetBIOS

o--A Contain Netware

o--A Contain SAP

o--A Contain Telnet

o--A Deny AppleTalk

o--A Deny Bootp/DCHP Servers

o--A Deny CTRIX

o--A Deny FTP

o--A Deny Internet Access

o--A Deny MMAC+ Polls

o--A Deny Raw NetBIOS

o--A Deny SAP

o--A Deny VoIP

o--A High Priority Internet Access

o--A High Priority SAP

o--A High Priority VoIP

o--A Low Priority Internet Access

o--A Routing Protocols

Details View

General

Roles

Contents of Service/Contain IP Eng Subnet Traffic

Name	Rule Status	Rule Type	Rule Value	Rule Mask	VLAN	COS
o--A contain subnet 54	Enabled	IP Address Bilateral	10.20.54.0	255.255.255.0	5[Engineering]	Priority 7
o--A contain subnet 55	Enabled	IP Address Bilateral	10.20.55.0	255.255.255.0	5[Engineering]	Priority 7
o--A contain subnet 56	Enabled	IP Address Bilateral	10.20.56.0	255.255.255.0	5[Engineering]	Priority 6
o--A contain subnet 57	Enabled	IP Address Bilateral	10.20.57.0	255.255.255.0	5[Engineering]	Priority 4

FIG. 10

REPLACEMENT SHEET

9/16

File Edit View Tools Help

Close Save Enforce Verify Delete Print Copy Paste Add Events Help

Roles Services VLANs Classes of Service

Roles

- Administrator
- Engineering**
- General Access Users
- Isolated Internet Access
- Restricted Users
- Sales and Accounting Personnel

General Services Roles

Name: Engineering

Default ☒

VLAN: 5[Engineering]

COS: None

Description

The Engineering role is intended to be available only to the engineers

Access to the Sales and Accounting Personnel is denied

FIG. 11

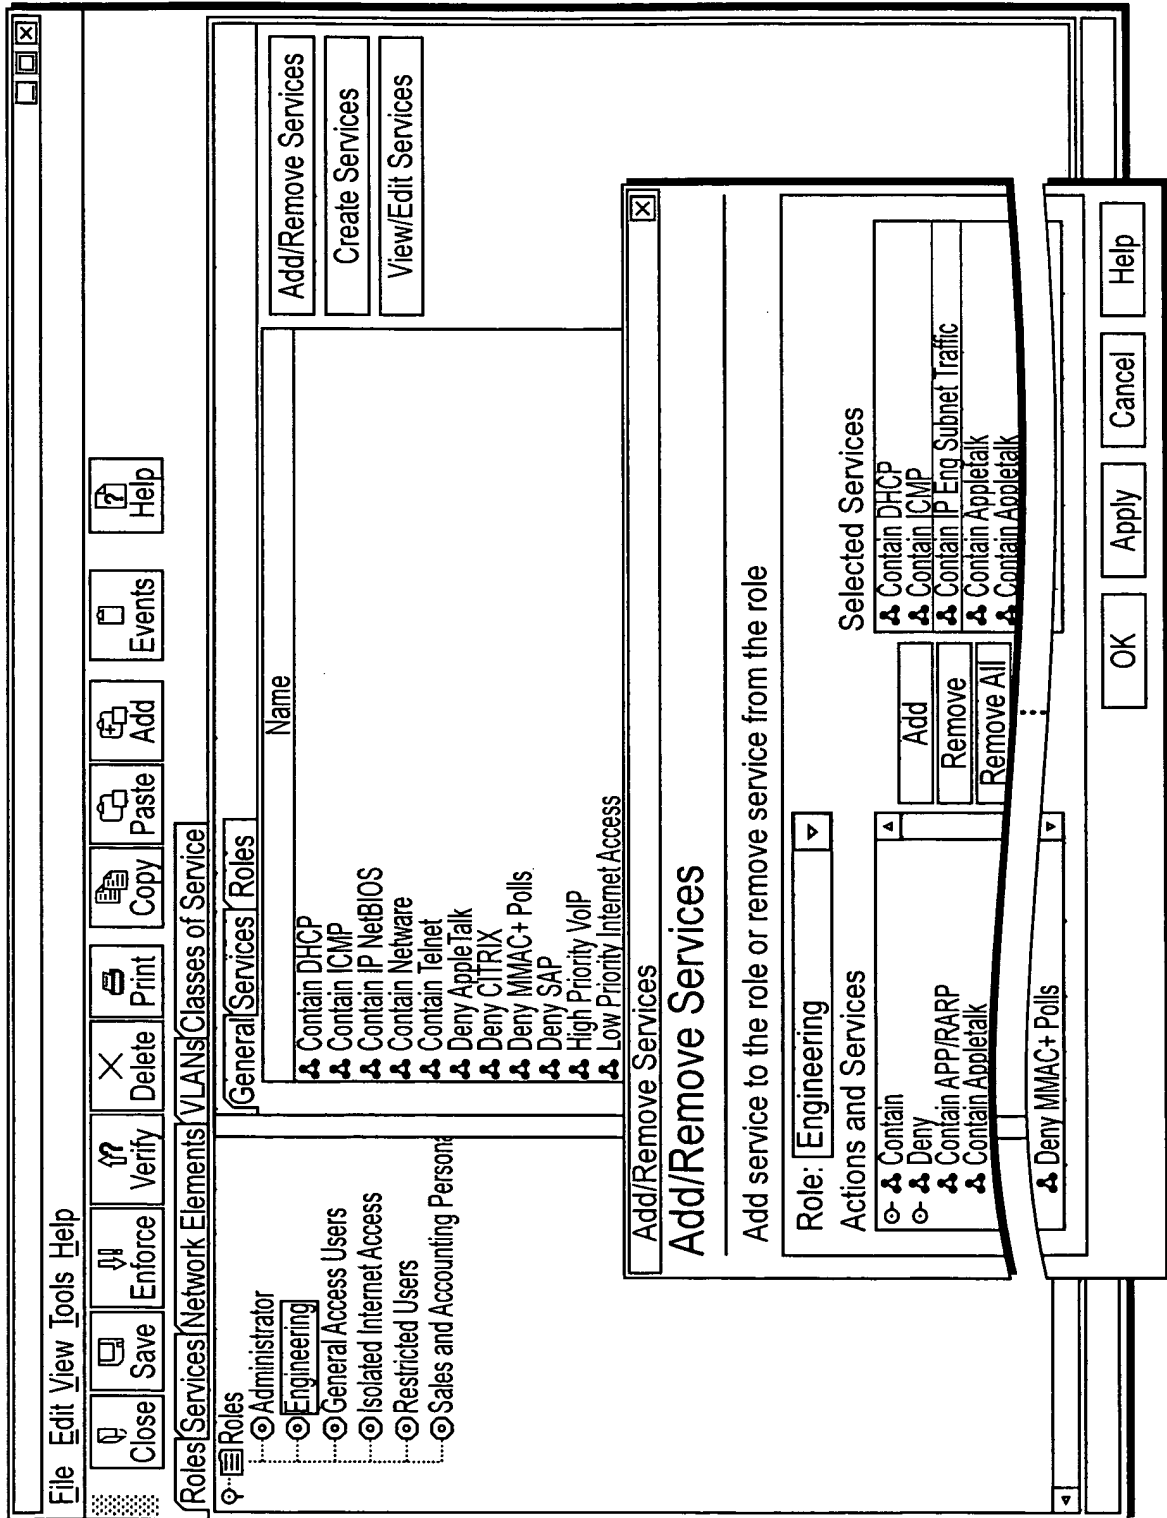


FIG. 12

REPLACEMENT SHEET

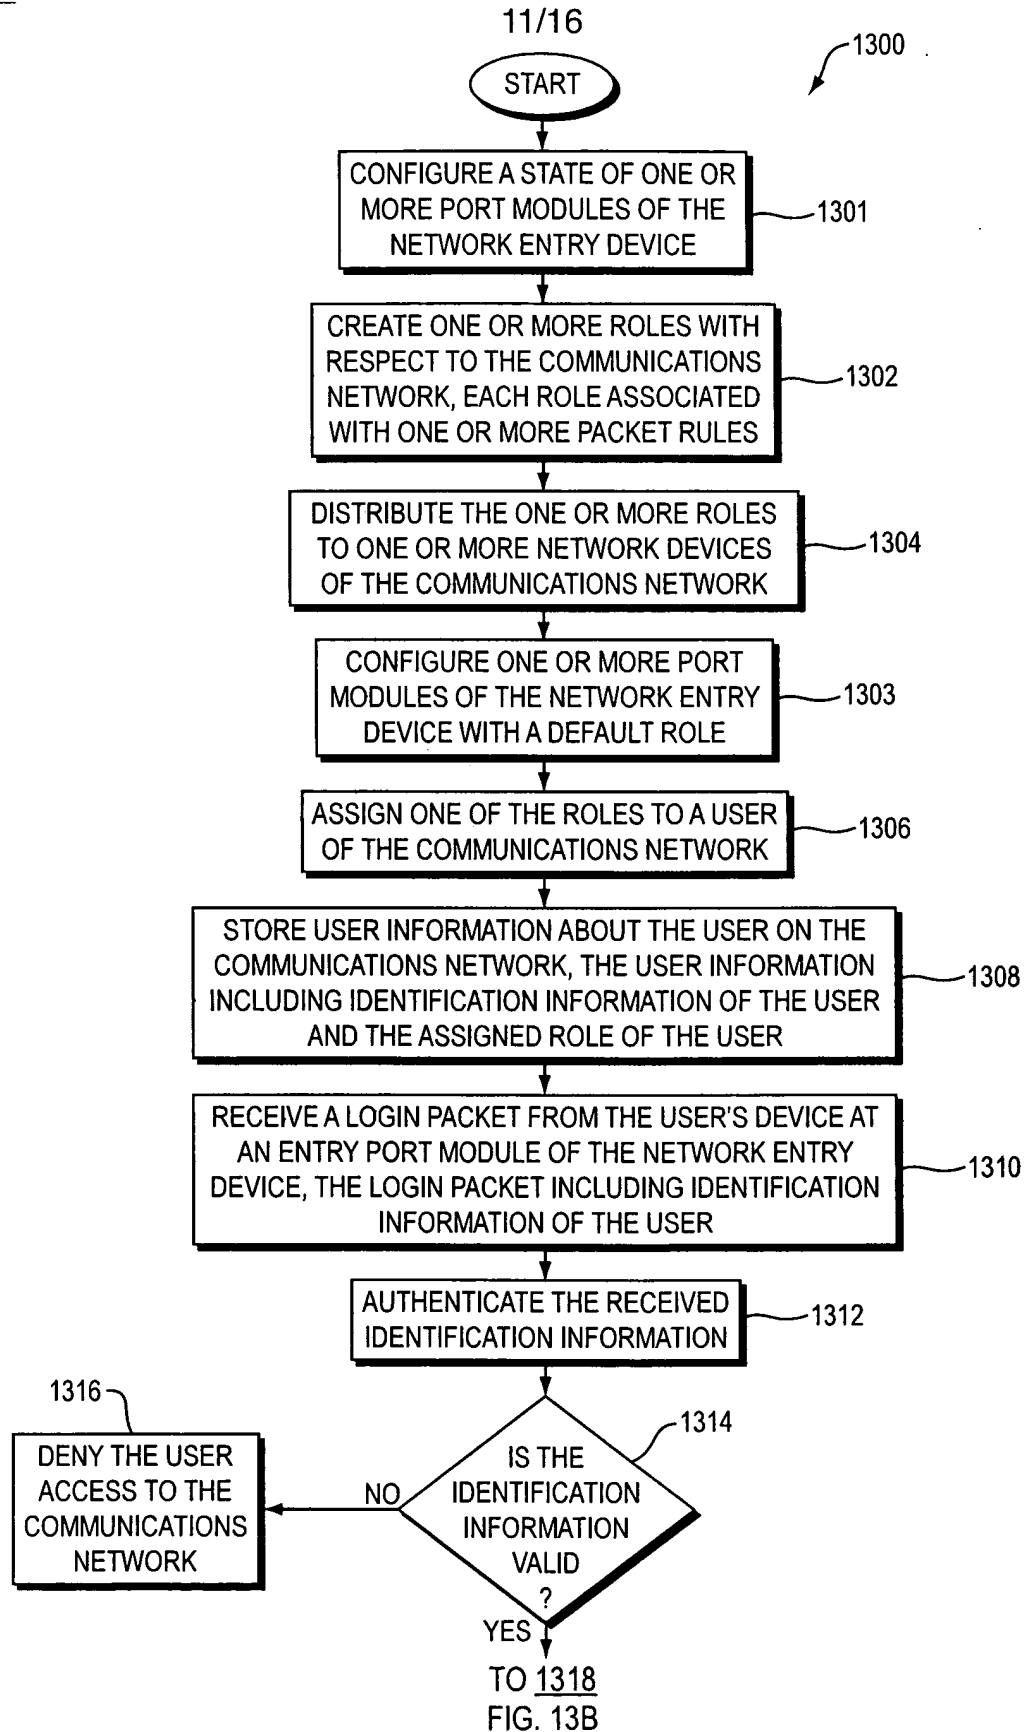


FIG. 13A

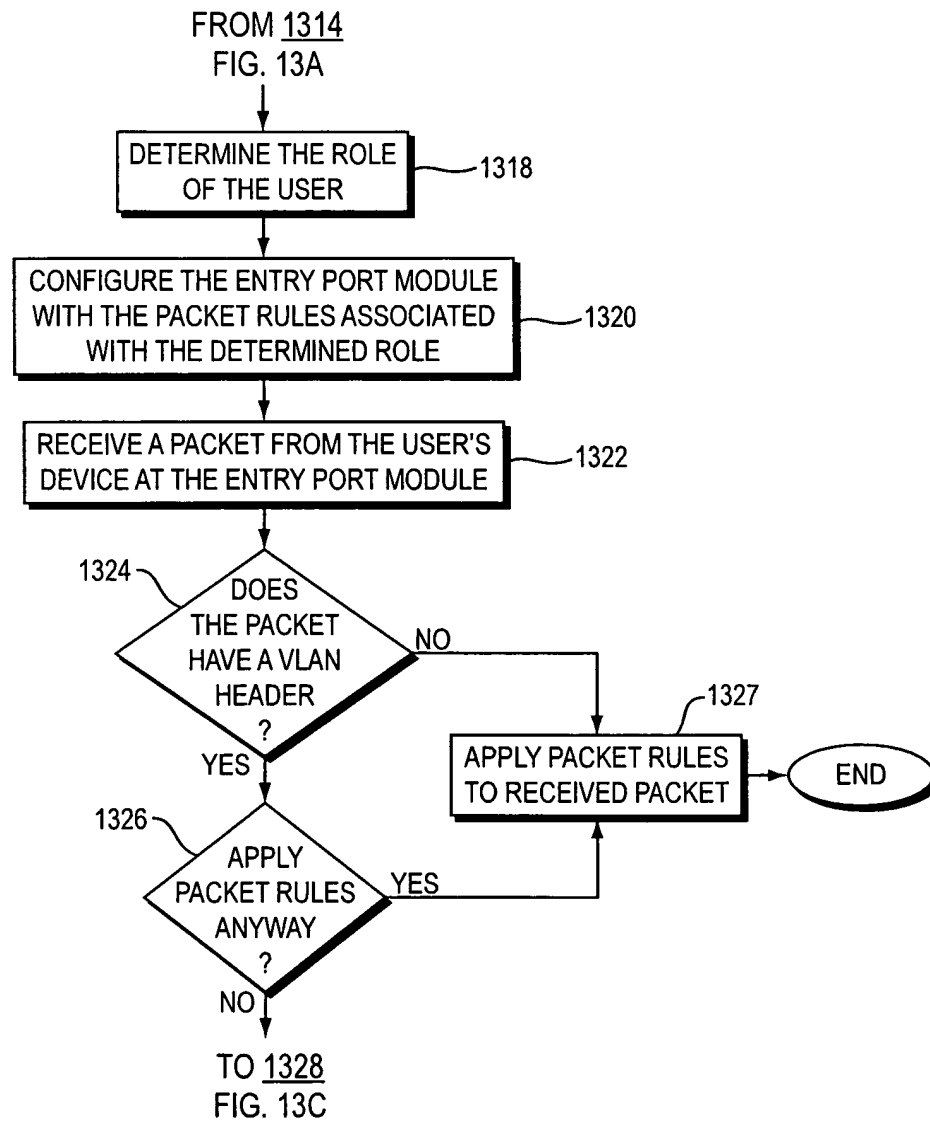


FIG. 13B

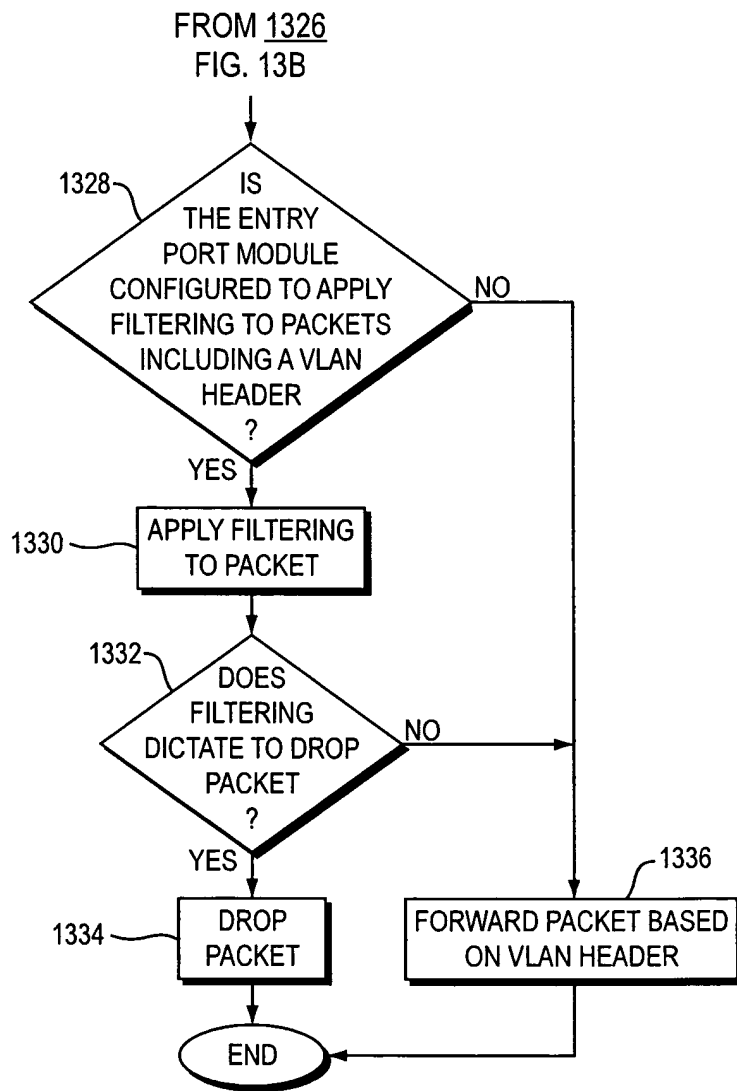


FIG. 13C

REPLACEMENT SHEET

14/16

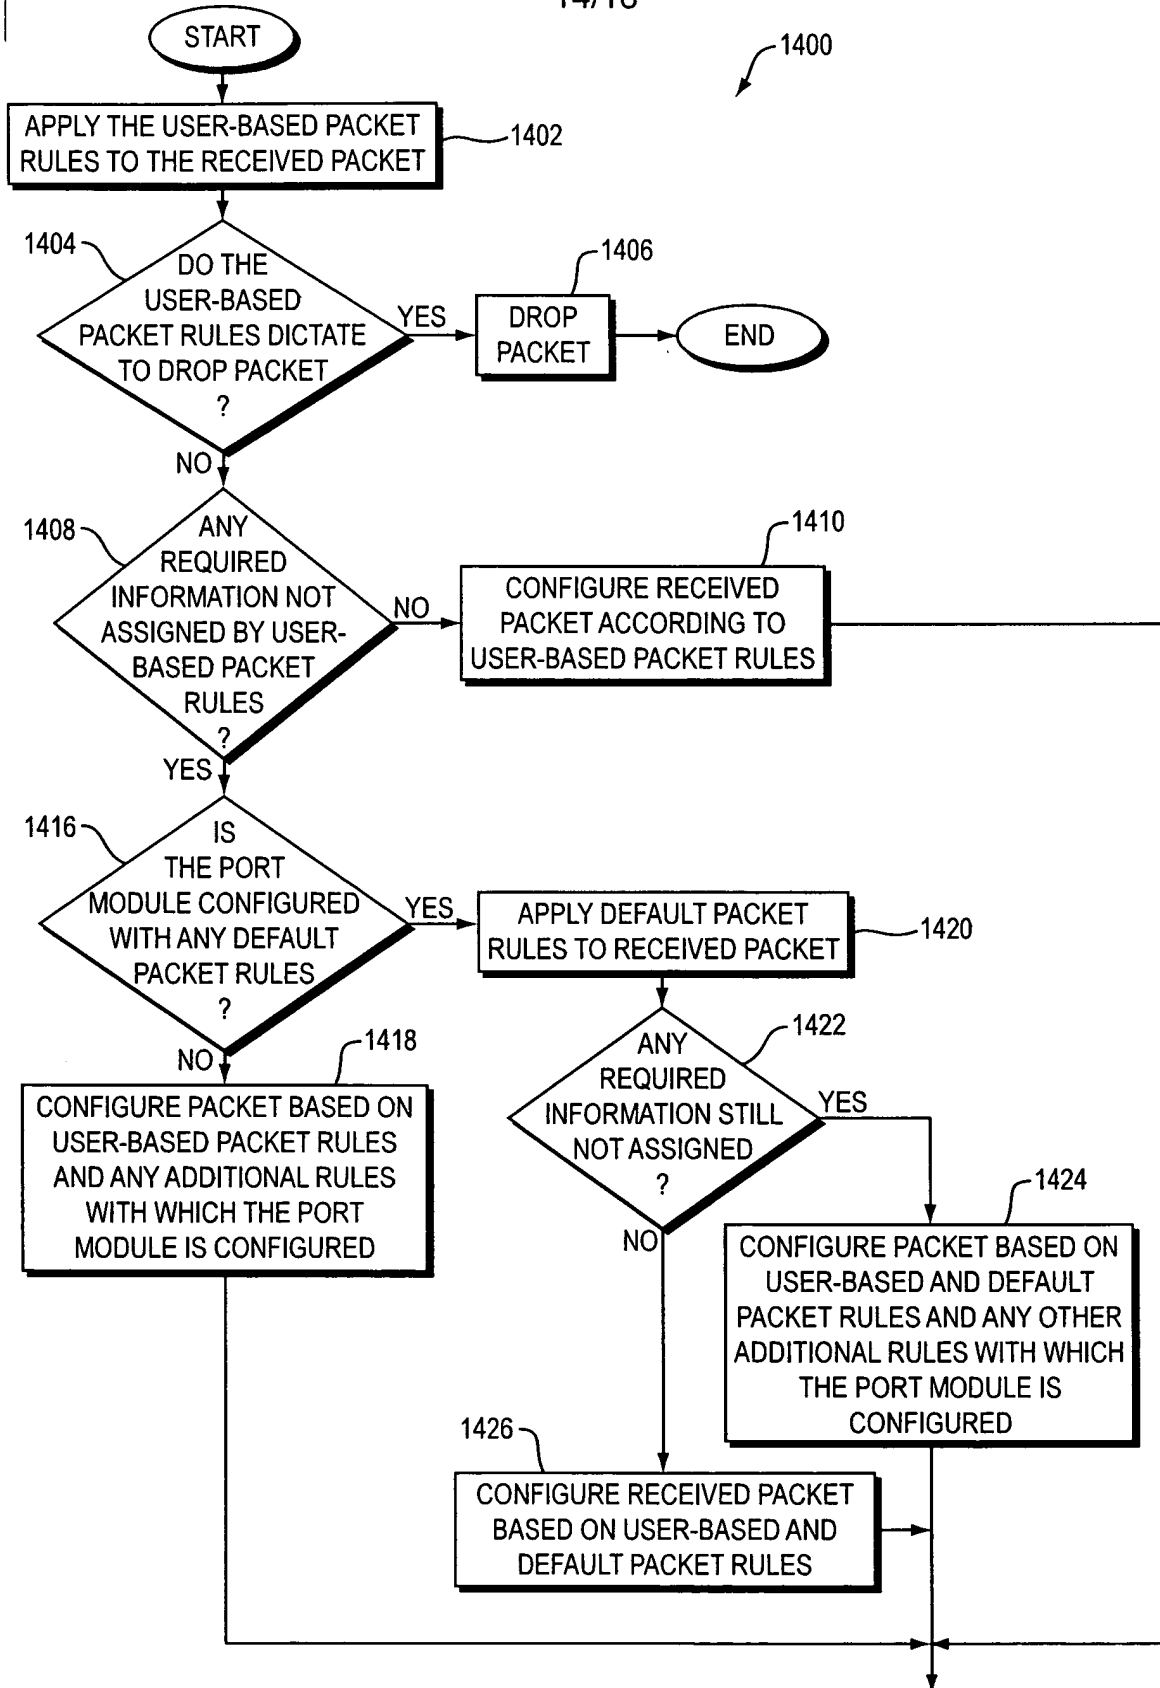


FIG. 14A

TO 1428
FIG. 14B

REPLACEMENT SHEET

15/16

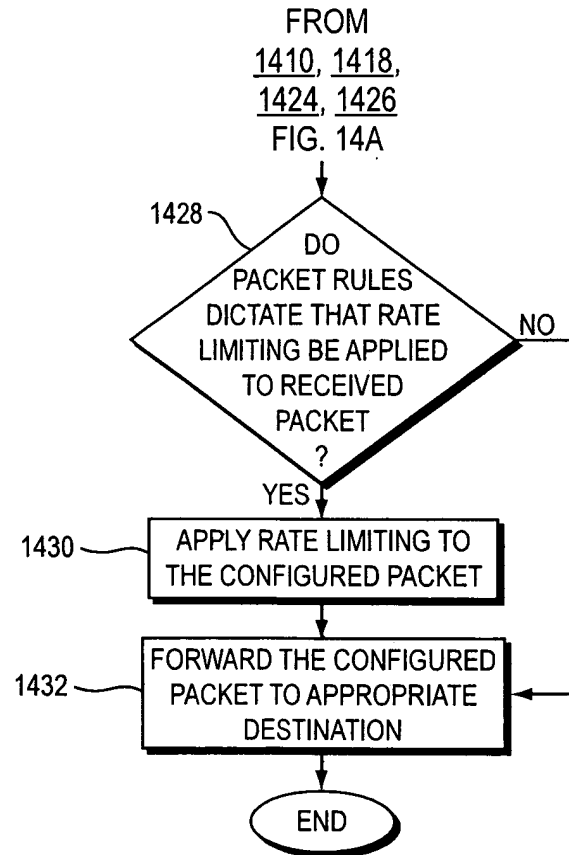


FIG. 14B

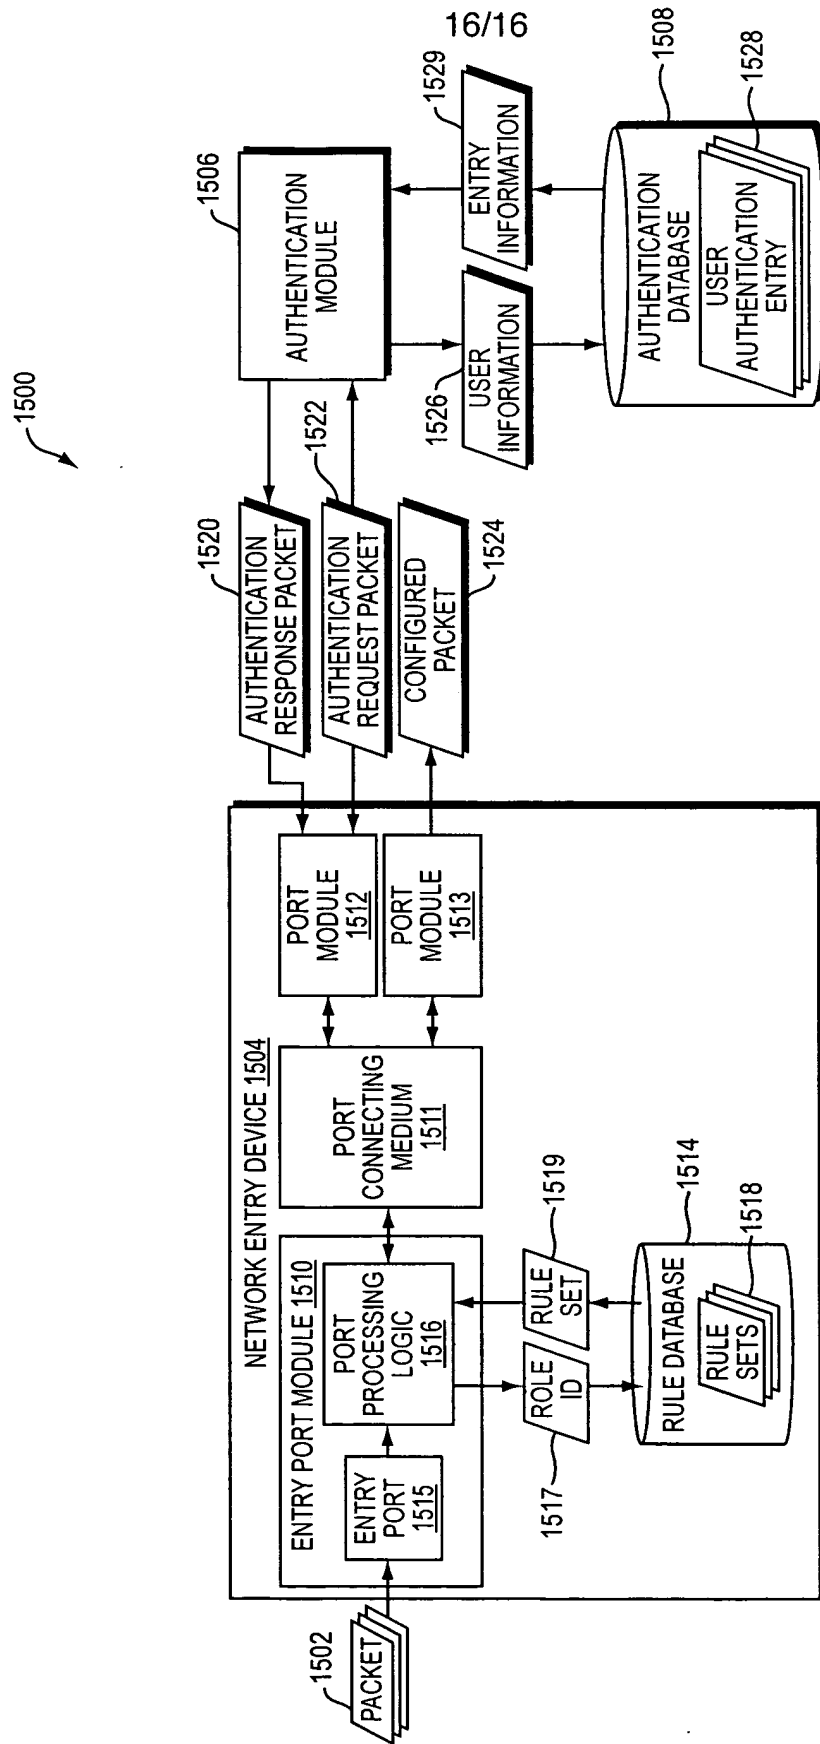


FIG. 15